




# OPERATOR'S MANUAL

MODEL #200934  
BACKPACK BLOWER



REGISTER YOUR PRODUCT ONLINE

at [championpowerequipment.com](http://championpowerequipment.com)

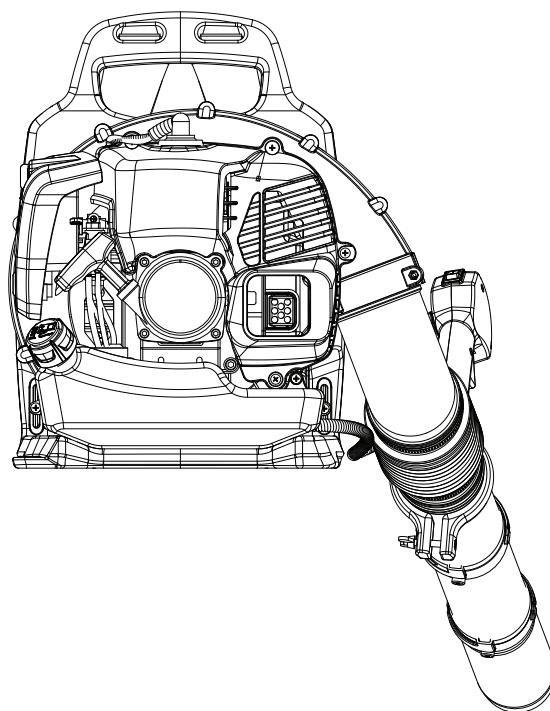

 1-877-338-0999

or visit [championpowerequipment.com](http://championpowerequipment.com)

## ⚠ WARNING

To reduce the risk of injury, the user must read and understand the operator's manual before using this product. If you do not understand the warnings and instructions in the operator's manual, do not use this product.

## 💬 NOTICE

Do not use E15 or E85 fuel (fuel containing greater than 10% ethanol) in this product. It will damage the engine and void your warranty. FUEL MIXTURE for this product is powered by a 2-cycle engine and requires pre-mixing gasoline and 2-cycle oil in a 50:1 ratio. Pre-mix unleaded gasoline and 2-cycle engine oil in a clean container approved for gasoline. DO NOT mix quantities larger than usable in a 30-day period.

**SAVE THESE INSTRUCTIONS.** This manual contains important safety precautions which should be read and understood before operating the product. Failure to do so could result in serious injury. This manual should remain with the product.

Specifications, descriptions and illustrations in this manual are as accurate as known at the time of publication, but are subject to change without notice.



## TABLE OF CONTENTS

<b>Introduction</b>	<b>3</b>
<b>Safety Definitions</b>	<b>3</b>
<b>Important Safety Instructions</b>	<b>4</b>
Fuel Safety	5
Safety Labels	6
Safety Symbols	7
Operation Symbols	8
Quick Start Label Symbols	8
<b>Controls and Features</b>	<b>9</b>
Backpack Blower	9
Parts Included	10
<b>Assembly</b>	<b>11</b>
Operation	12
Fueling and Refueling	12
Filling the Fuel Tank	12
Starting and Stopping	12
To Stop the Engine:	14
Proper Blower Operation	14
Cruise Control Feature	15

<b>Maintenance</b>	<b>15</b>
General Maintenance	15
Cleaning the Air Filter	15
Fuel Cap	16
Spark Plug	16
Maintenance Schedule	16
Storing The Blower	16
<b>Specifications</b>	<b>16</b>
Backpack Blower Specifications	16
<b>Troubleshooting</b>	<b>17</b>



## INTRODUCTION

Congratulations on your purchase of a Champion Power Equipment (CPE) product. CPE designs, builds, and supports all of our products to strict specifications and guidelines. With proper product knowledge, safe use, and regular maintenance, this product should bring years of satisfying service.

Every effort has been made to ensure the accuracy and completeness of the information in this manual at the time of publication, and we reserve the right to change, alter and/or improve the product and this document at any time without prior notice.

Since CPE highly values how our products are designed, manufactured, operated and are serviced, and also highly value your safety and the safety of others, we would like you to take the time to review this product manual and other product materials thoroughly and be fully aware and knowledgeable of the assembly, operation, dangers and maintenance of the product before use. Fully familiarize yourself, and make sure others who plan on operating the product fully familiarize themselves too, with the proper safety and operation procedures before each use. Please always exercise common sense and always err on the side of caution when operating the product to ensure no accident, property damage, or injury occurs. We want you to continue to use and be satisfied with your CPE product for years to come.

When contacting CPE about parts and/or service, you will need to supply the complete model and serial numbers of your product. Transcribe the information found on your product's nameplate label to the table below

CPE TECHNICAL SUPPORT TEAM
1-877-338-0999
MODEL NUMBER
200934
SERIAL NUMBER
DATE OF PURCHASE
PURCHASE LOCATION

## SAFETY DEFINITIONS

The purpose of safety symbols is to attract your attention to possible dangers. The safety symbols, and their explanations, deserve your careful attention and understanding. The safety warnings do not by themselves eliminate any danger. The instructions or warnings they give are not substitutes for proper accident prevention measures.

### DANGER

DANGER indicates a hazardous situation which, if not avoided, will result in death or serious injury.

### WARNING

WARNING indicates a hazardous situation which, if not avoided, could result in death or serious injury.

### CAUTION

CAUTION indicates a hazardous situation which, if not avoided, could result in minor or moderate injury.

### NOTICE

NOTICE indicates information considered important, but not hazard-related (e.g., messages relating to property damage).



## IMPORTANT SAFETY INSTRUCTIONS

### DANGER

The blower engine exhaust contains carbon monoxide, a colorless, odorless, poison gas. Breathing carbon monoxide will cause nausea, dizziness, fainting or death.

If you start to feel dizzy or weak, get to fresh air immediately.

Always operate the blower outdoors only in a well-ventilated area.

NEVER operate the blower inside any building, including garages, sheds or other confined spaces.

DO NOT allow exhaust fumes to enter a confined area through windows, doors, vents or other openings while operating the blower.

### DANGER

Using an engine indoors **CAN KILL YOU IN MINUTES**. Engine exhaust contains carbon monoxide. This is a poison you cannot see or smell.

### DANGER

Do not allow untrained individuals or children to use this blower.

### NOTICE

In some State and local jurisdictions and to comply with local noise ordinances, operate your blower during established hours of operation. For more information, contact your State and local government for specific use of operation requirements.

### WARNING

- Clear the work area before each use. Remove all objects such as rocks, broken glass, nails, wire, or string which can be thrown or become entangled in the machine.
- Keep all bystanders, children, and pets at least 50 ft. (15.2 m) away, there is a risk of injury from thrown objects. Bystanders should be encouraged to wear eye protection.
- Never point the blower nozzle in the direction of people or pets.
- Always wear sound protection (ear muffs or ear plugs) to protect your hearing to reduce the risk of hearing loss associated with long term sound level(s).
- When wearing hearing protection be alert and cautious to warnings such as shouts and other alarms.
- Always wear eye protection with side shields to comply with ANSI Z87.1. Failure to do so could result in objects being thrown into your eyes and other possible serious injuries.
- To reduce the risk of injury associated with objects being drawn into rotating parts, do not wear loose clothing, scarves, jewelry, neck chains, sandals or go barefoot.
- Always secure hair so it is above shoulder level to prevent entanglement in any rotating parts.
- Keep all body parts away from any moving parts and all hot surfaces of the blower.
- Do not operate this blower when you are tired, ill, or under the influence of alcohol, drugs, or medication.
- Do not operate in poor lighting.



**⚠ WARNING**

- Wear a face filter mask in dusty conditions to reduce the risk of injury associated with the inhalation of dust.
- Keep firm footing and balance. Do not overreach. Overreaching can result in loss of balance or exposure to hot contact surfaces.
- Do not use on a ladder, rooftop, tree, or other unstable support. Stable footing on a solid surface enables better control of the blower in unexpected situations.
- Never run the unit without the proper equipment attached. Always ensure the blower tubes are installed.
- This engine is equipped with a spark arrestor screen. Never operate the unit without a spark arrestor screen, this screen is located inside the muffler.
- Always inspect the unit before each use for loose fasteners, fuel leaks, etc. Replace damaged parts.
- Use only identical manufacturer's replacement parts and accessories. Use of any other parts may create a hazard or cause product damage and void your warranty.
- Before cleaning, repairing, or inspecting, shut off the engine and make certain all moving parts have stopped. Disconnect the spark plug wire and keep the wire away from the spark plug to prevent starting.
- To reduce the risk of injury associated with contacting rotating impeller blades, stop the engine before installing or changing blower tubes.
- Service on the blower should be performed by qualified repair personnel only. Service or maintenance performed by unqualified personnel could result in injury to the user or damage to the product.
- Always maintain the blower per the maintenance instructions of this Operator's Manual.
- Use only as directed per this operator's manual instructions.

- Gasoline can cause a fire or explosion if ignited.
- Gasoline is a liquid fuel but its vapors can ignite.
- Gasoline is a skin irritant and needs to be cleaned up immediately if spilled on skin or clothes.
- Gasoline has a distinctive odor, this will help detect potential leaks quickly.
- In any petroleum gas fire, flames should not be extinguished unless by doing so the fuel supply valve can be turned OFF. This is because if a fire is extinguished and a supply of fuel is not turned OFF, then an explosion hazard could be created.
- Gasoline expands or contracts with ambient temperatures. Never fill the gasoline tank to full capacity, as gasoline needs room to expand if temperatures rise.

**When adding or removing gasoline:**

Do not light or smoke cigarettes while handling fuel.

Always mix, store or transfer gasoline in an EPA/CARB compliant fuel tank.

Only mix and refuel outdoors where there are no sparks or flames.

Only drain gasoline outdoors in a well-ventilated area.

Always loosen fuel cap slowly to release pressure and to keep fuel from escaping around the fuel cap and add fuel before starting the engine.

Always replace and tighten the fuel cap securely after fueling.

Always stop engine and allow to cool before refueling.

Never remove the fuel cap or add fuel while the engine is running or when the engine is hot.

In the event of spilled fuel, wipe the spilled fuel from the blower and move 10' ft. (3 m) away from refueling site before starting engine to avoid potential ignition of fuel vapors.

Always store fuel in a cool, well-ventilated area, safely away from spark and/or flame-producing equipment.

Save these instructions. Refer to them frequently and use them to instruct others who may use this product. If you loan someone this equipment, provide them these instructions also.

**Fuel Safety****⚠ DANGER**

**GASOLINE AND GASOLINE VAPORS ARE HIGHLY FLAMMABLE AND EXPLOSIVE.**

Fire or explosion can cause severe burns or death.

**⚠ WARNING**

NEVER use a gasoline container, gasoline tank, or any other fuel item that is broken, cut, torn or damaged.



**Gasoline and gasoline vapors:**

- Gasoline is highly flammable and explosive.
- Harmful or fatal if swallowed.



Safety Labels

These labels warn you of potential hazards that can cause serious injury. Read them carefully.  
If a label comes off or becomes hard to read, contact Technical Support Team for possible replacement.

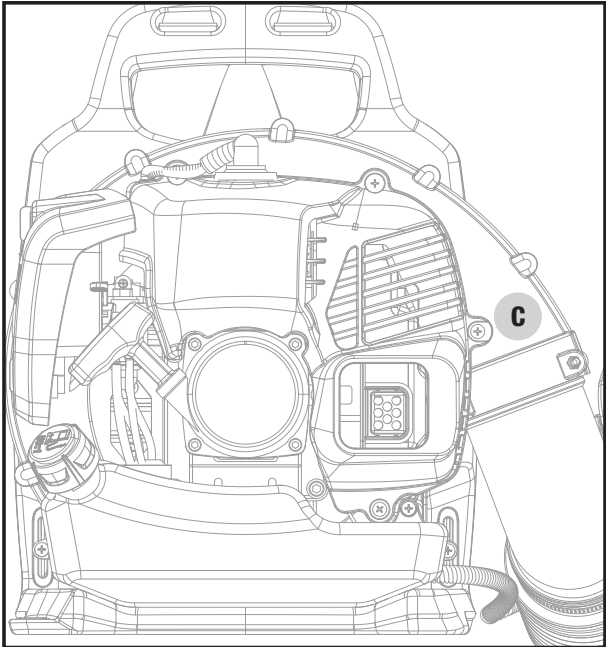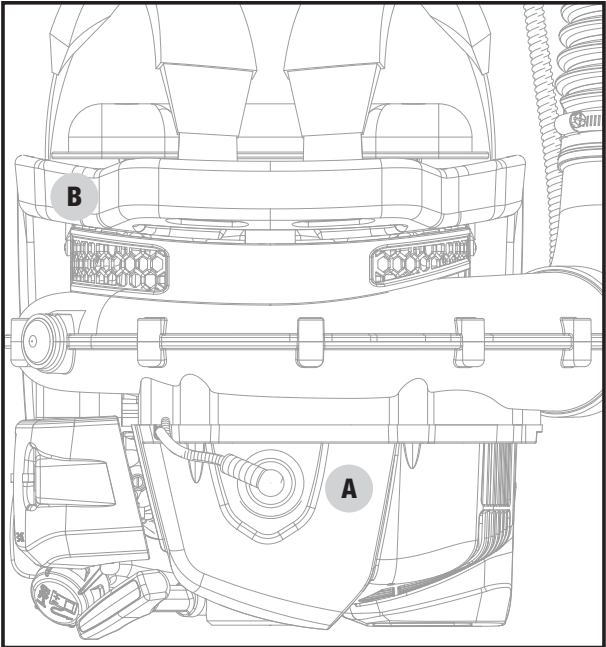










LABEL		DESCRIPTION
A		Hot Surface
B		Safety Symbols
C		



## Safety Symbols



Some of the following symbols may be used on this product. Please study them and learn their meaning. Proper interpretation of these symbols will allow you to more safely operate the product.

SYMBOL	MEANING
	<b>Read Operator's Manual.</b> To reduce the risk of injury, user must read and understand operator's manual before using this product.
	<b>Eye and Ear Protection.</b> Always wear safety goggles or safety glasses with side shields, and as necessary a full face-shield as well as full ear protection when operating this product.
	<b>Safety Alert.</b> Precautions that involve your safety.
	<b>Risk of Fire/Explosion.</b> Fuel and its vapors are extremely flammable and explosive. Fire can cause severe burns or death. Do not add fuel while the product is operating or still hot. <b>Open Flame alert.</b> Fuel and its vapors are extremely flammable and explosive. Keep fuel away from smoking, open flames, sparks, pilot lights, heat, and other ignition sources.
	<b>Toxic Fumes.</b> The engine exhaust from this product contains chemicals known to the state of California to cause cancer and birth defects and other reproductive harm. <b>Risk of Asphyxiation.</b> This engine emits carbon monoxide, an odorless, colorless poison gas. Breathing carbon monoxide can cause nausea, fainting or death. Use only in a well ventilated area.
	<b>Thrown Objects.</b> Beware of thrown objects.
	<b>Clearance.</b> Keep all objects including others at least 50' (15.2 m) from this machine.
	<b>Hot Surface.</b> To reduce the risk of injury or damage, avoid contact with any hot surface.
	<b>Rotating Impeller.</b> Keep clear of blower outlet. Never point the blower at yourself or others. <b>Rotating Blades.</b> Never put your hand in the chute. Contact with rotating parts can amputate fingers and hands.



## Operation Symbols

Some of the following symbols may be used on this product. Please study them and learn their meaning. Proper interpretation of these symbols will allow you to more safely operate the product.

SYMBOL	MEANING
	<b>Choke.</b> Move choke lever to “RUN” position. See Starting and Stopping Section.
	<b>Choke.</b> Move choke lever to “CHOKE” position. See Starting and Stopping Section.

## Quick Start Label Symbols

Some of the following symbols may be used on this product. Please study them and learn their meaning. Proper interpretation of these symbols will allow you to more safely operate the product.



### Starting the Engine


1. **Check fuel.** Make sure fuel-to-oil mixture is 50:1 and add if necessary.
2. Move choke knob to **CHOKE** position.
3. **Primer bulb:**
  - 3a. For cold starts, press primer bulb 7-14 times.
  - 3b. For warm starts, DO NOT press primer bulb.
4. Set cruise control lever to about 1/2 throttle position.
5. Pull recoil handle 1-6 times.
6. Move choke knob to **RUN** position.
7. Pull recoil handle 1-6 times.
8. Allow the engine to idle for 30 seconds.



## CONTROLS AND FEATURES

Read this operator's manual before operating your backpack blower. Familiarize yourself with the location and function of the controls and features. Save this manual for future reference.

### Backpack Blower

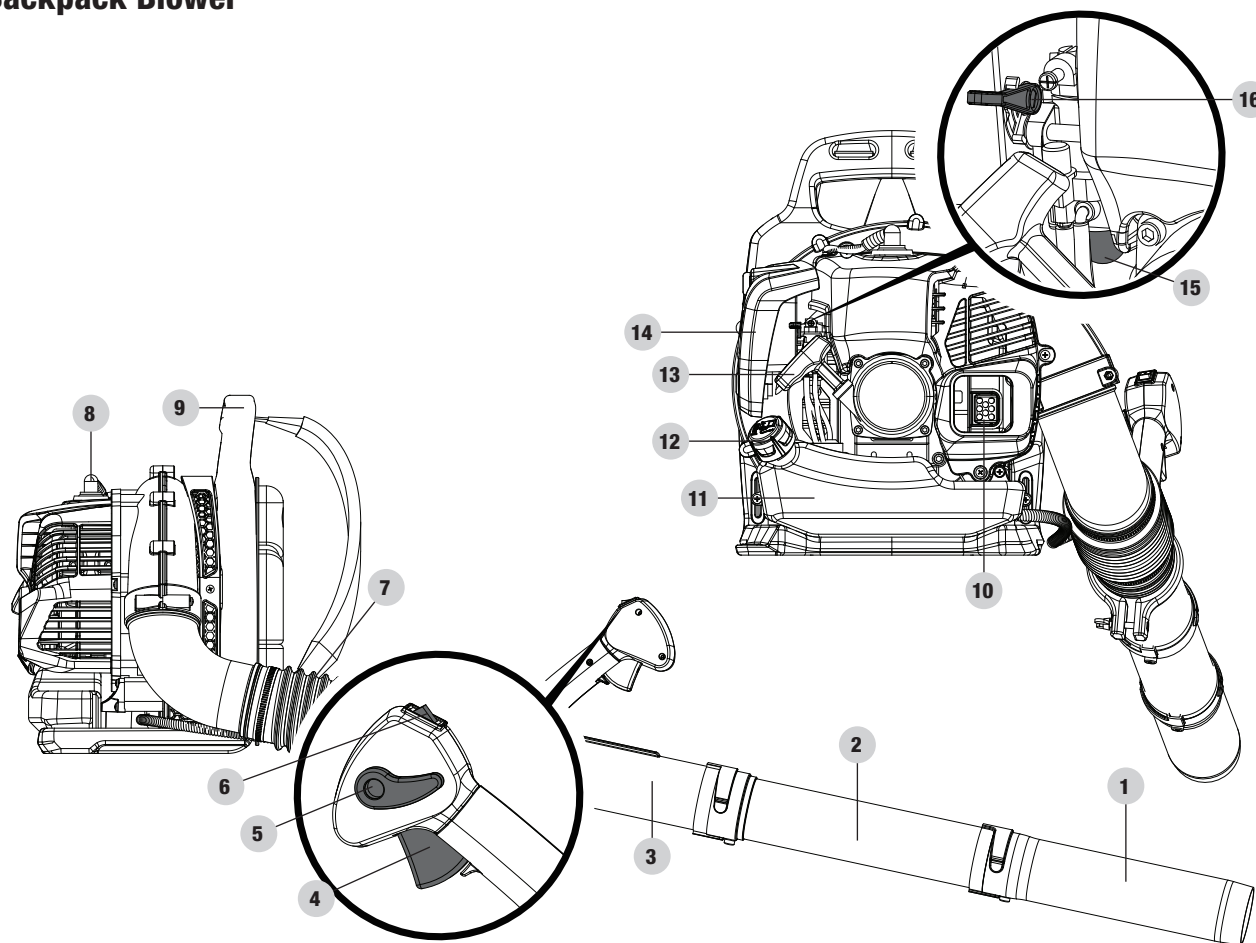

1. Lower blower tube
2. Middle blower tube
3. Upper blower tube
4. Throttle trigger
5. Cruise control lever
6. STOP switch
7. Flex tube
8. Spark plug
9. Carry handle


10. Muffler
11. Fuel Tank
12. Fuel cap
13. Starter grip
14. Air filter
15. Primer bulb
16. Choke



## Parts Included


### Accessories

Spark plug wrench .....	1
Reversible flathead and cross-head screwdriver .....	1
2-cycle oil .....	2.6 fl .oz.(76 ml)

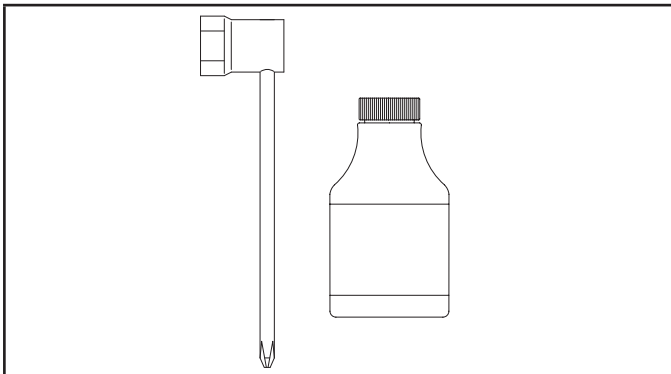


### Assembly Parts


Blower body .....	1
-------------------	---

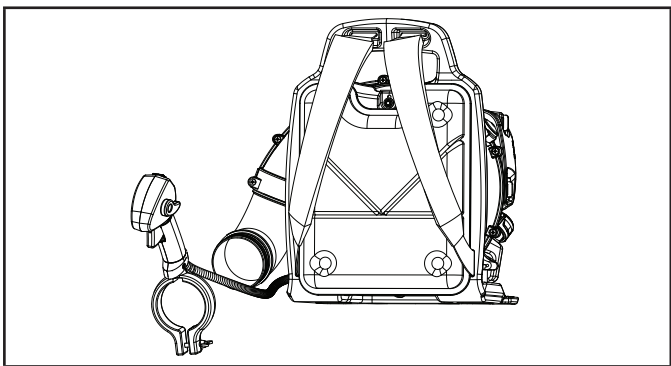

Clamps.....	2
Flex tube .....	1

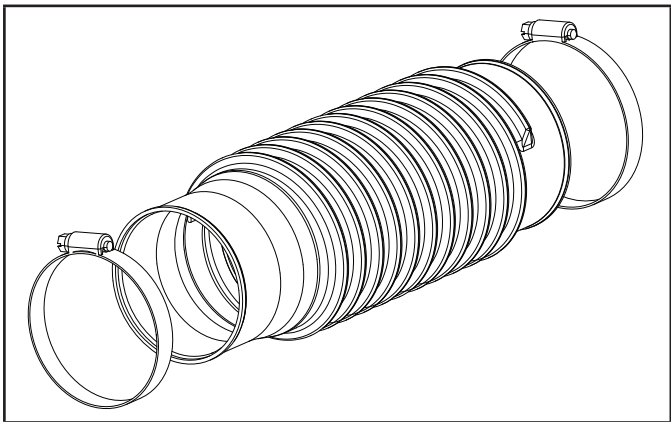

Blower tubes .....	3
--------------------	---

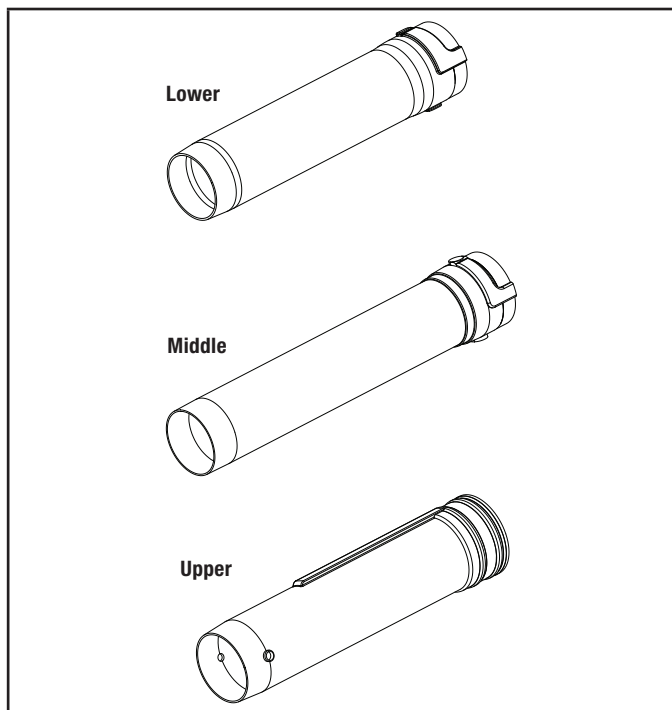





## ASSEMBLY

Your blower requires some assembly. If you have any questions regarding the assembly of your blower, call our Technical Support Team at 1-877-338-0999. Please have your serial number and model number available.


1. Attach flex tube to elbow on blower body. Tighten the clamp fully.

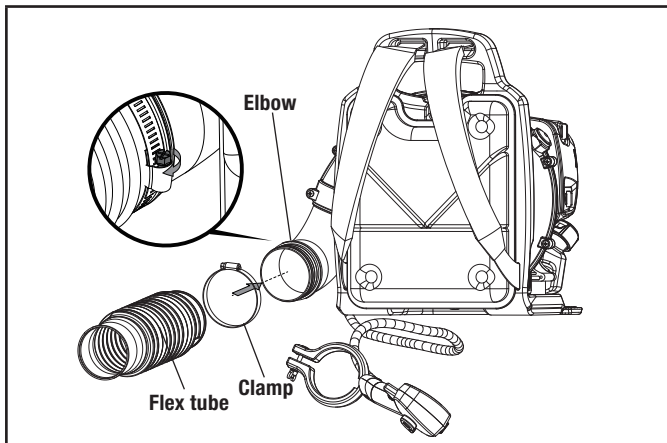


2. Install flex tube to upper blower tube (with the throttle handle guide). Tighten the clamp fully.

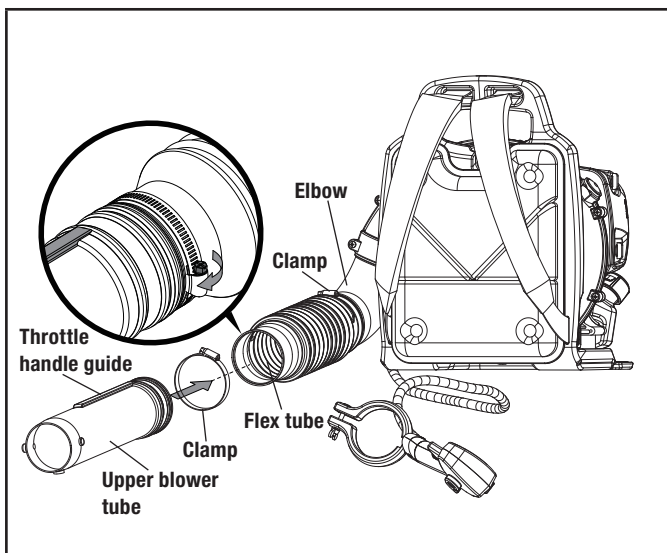


3. Loosen wing nut completely on throttle handle clamp. Align notches in throttle handle clamp with guide on the upper blower tube and slide on as shown. When the throttle handle is at the desired length, tighten the wing nut fully to secure.

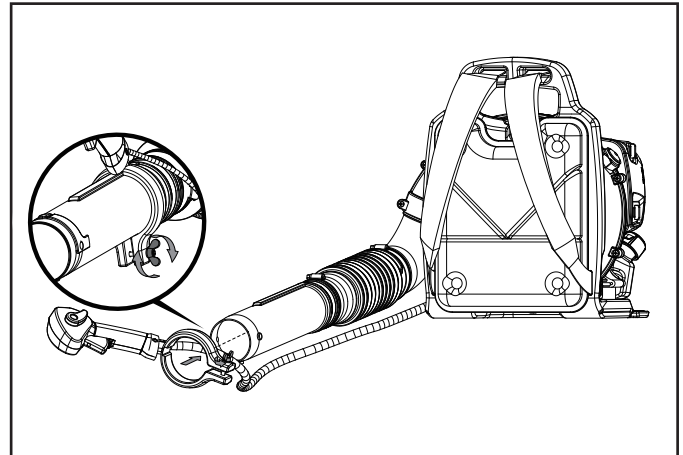

4. Assemble upper blower tube to middle blower tube by aligning the arrow of the peg of tube with the arrow of the locking groove of tube. Slide the peg into the locking groove and rotate clockwise to lock in place.

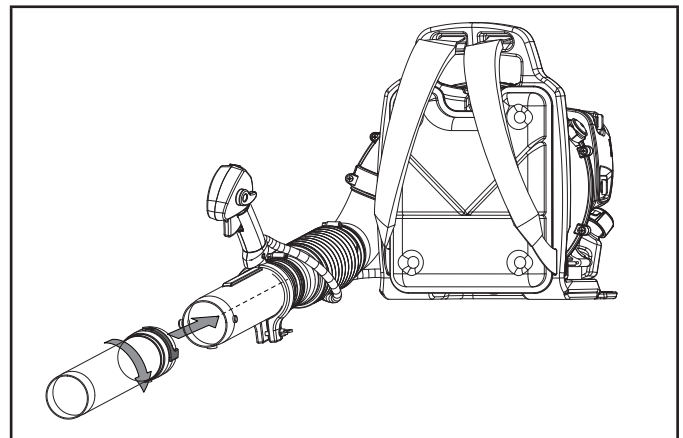

5. Assemble middle blower tube to lower blower tube by aligning the arrow of the peg of tube with the arrow of the locking groove of tube. Slide the peg into the locking groove and rotate clockwise to lock in place.

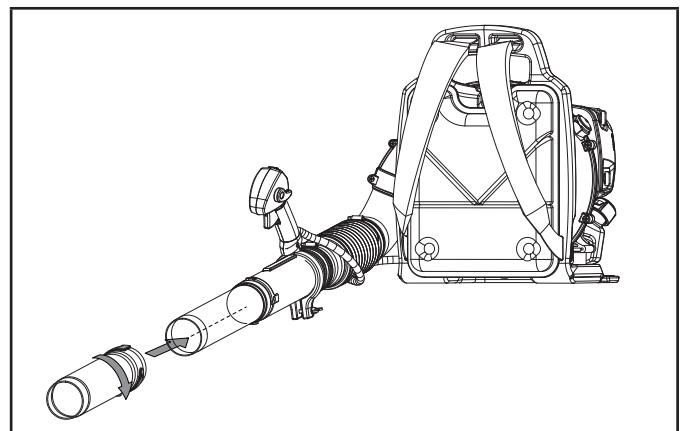



## OPERATION

### Fueling and Refueling

#### Fuel Mixture

This product is powered by a 2-cycle engine and requires pre-mixing gasoline and 2-cycle oil in a 50:1 ratio. Pre-mix unleaded gasoline and 2-cycle engine oil in a clean container approved for gasoline. DO NOT mix quantities larger than usable in a 30-day period. Recommended fuel: This engine is certified to operate on unleaded gasoline intended for automotive use.


When mixing fuel, always use clean, fresh, regular unleaded gasoline with minimum octane rating of 85 and an ethanol content of 10% or less by volume. DO NOT USE E15 or E85. Recommended oil: Use premium 2-cycle oil, or an equivalent high-quality synthetic 2-cycle oil. Do not use automotive oil or 2-cycle outboard oil.

Gasoline (US gal.)	Oil (oz.)
1	2.6
2.5	6.4
3.0	7.7
4.0	10.2
5.0	12.8

Gasoline (L)	Oil (ml)
3.8	76
9.5	190
11.4	228
15.1	302
18.9	378

### Filling the Fuel Tank

1. Do not smoke while fueling or mixing fuel.
2. Mix and pour fuel outdoors where there are no sparks and flames.
3. Place the blower on a flat stable surface, with the fuel tank cap facing upwards.
4. Clean the surface around the fuel cap to prevent contamination.
5. Loosen the fuel cap slowly by turning counterclockwise.
6. Pour the fuel mixture carefully into the tank.

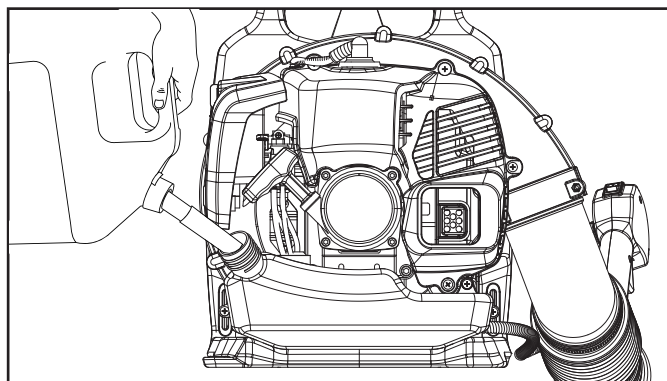

7. Only fill the fuel tank to 80% of the full capacity. Fuel level can be seen via the clear fuel tank.
8. Clean and inspect the fuel cap gasket before replacing the fuel cap.
9. Replace the fuel cap and tighten it by turning it clockwise.
10. Wipe spilled fuel from the product.
11. If you spill fuel on the unit, wait 10 minutes after wiping before starting.
12. Move at least 10 ft. (3 m) away from refueling area before starting the product.

**NOTE:** It is normal for smoke to be emitted from a new engine during first use.

#### **⚠ WARNING**

Always shut off engine before fueling. Never add fuel to a machine with a running or hot engine. Wait at least 15 minutes to allow for cool down before refueling. Move at least 10 ft. (3 m) from refueling site before starting engine. Do not smoke and stay away from open flames and sparks. Failure to safely handle fuel could result in serious personal injury.

#### **💬 NOTICE**

Do not use E15 or E85 fuel (fuel containing greater than 10% ethanol) in this product. The use of E15 will damage the engine and void your warranty.

### Starting and Stopping


#### **💬 NOTICE**

To avoid breaking the starter rope, do not pull the whole length or let it slide along the edge of the rope guide. Allow the starter rope to rewind gradually.




**To Start a Cold Engine:**


1. Blower should be on a flat, bare surface for starting.
2. Set the choke knob to the CHOKE position.

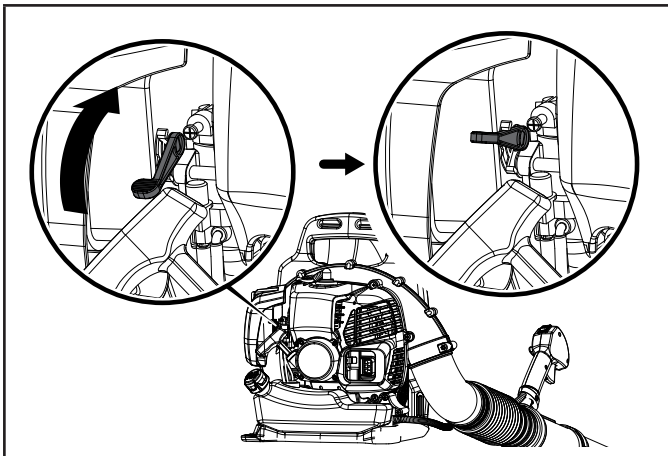


3. Slowly press the primer bulb 7-14 times or until fuel is visible and flows freely into the clear tank return line.

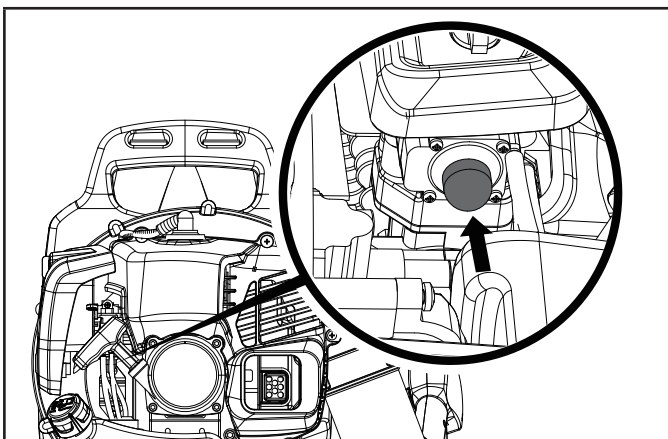


4. Set the cruise control lever to the half throttle position.

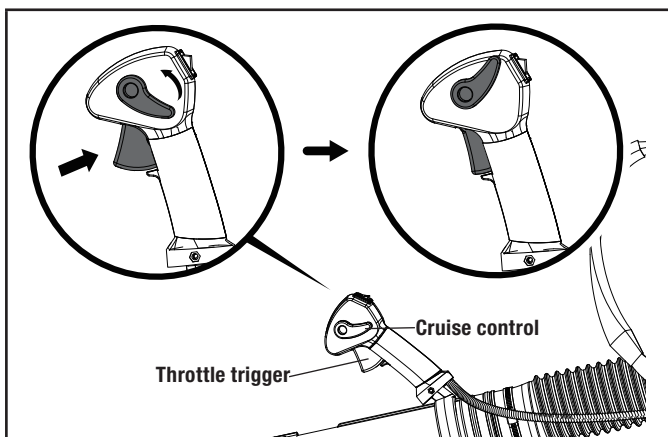

5. Holding the unit firmly, pull starter grip until engine starts. Use short pulls and do not allow the rope to snap back. Do not pull more than 6 times.

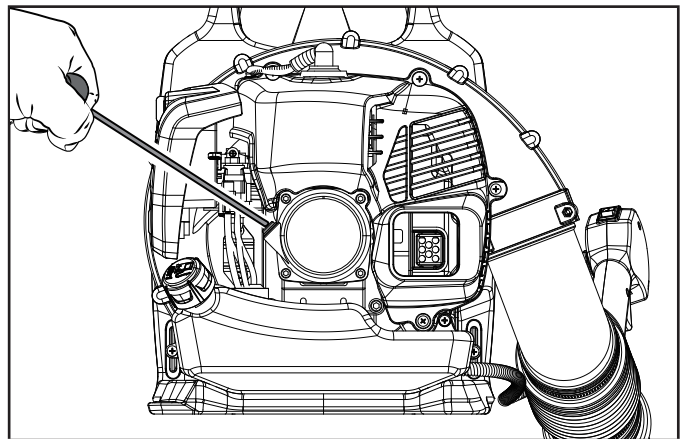


6. Move choke knob to the RUN position and pull recoil starter handle until engine starts. Do not pull more than 6 times.

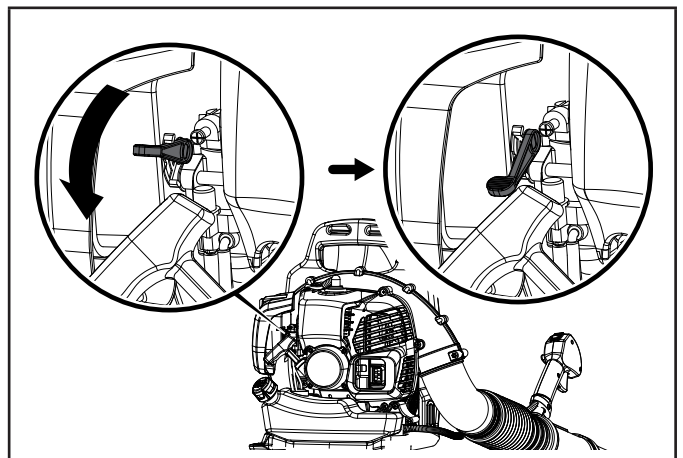**NOTICE**

Allow engine to warm at least 30-60 seconds depending on ambient temperature. The colder the temperature, the longer the warm up required.


**To Start a Warm Engine:**

1. Set the cruise control lever to the half throttle position.

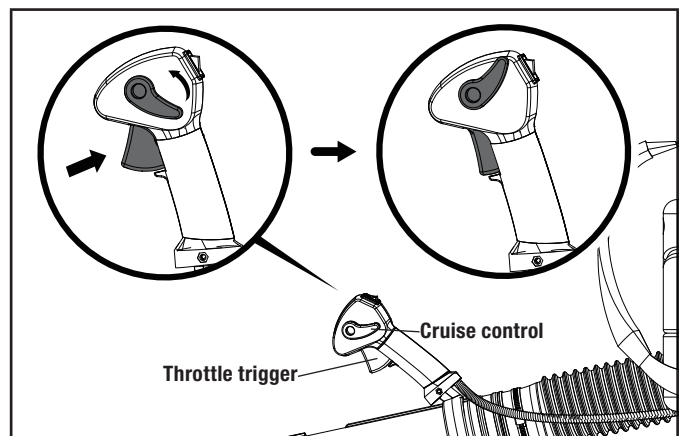



2. Holding the unit firmly, pull starter grip until engine starts. Use short pulls and do not allow the rope to snap back. Do not pull more than 5 times.

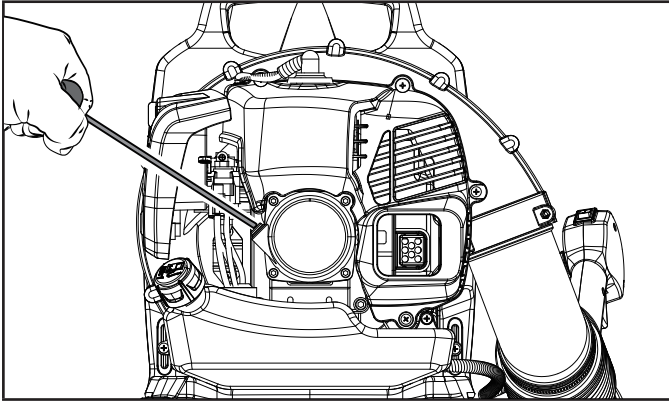


### NOTICE

If the engine does not start, return to the “Start a Cold Engine” and repeat the steps that follow.

## To Stop the Engine:

1. To stop the engine, ensure cruise control is off and let go of the throttle trigger.
2. Depress and hold the STOP switch to the STOP position until engine completely dies.

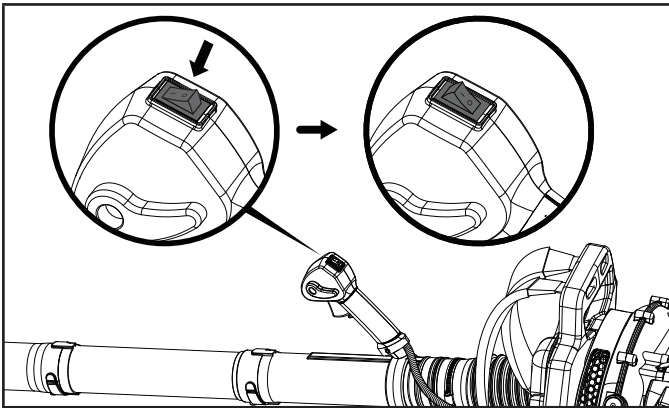

## Proper Blower Operation

### SAFETY:

- Fully familiarize yourself with the IMPORTANT SAFETY INSTRUCTIONS section of this manual.
- To keep from scattering debris, blow around the outer edges of a debris pile. Never blow directly into the center of a pile.
- Watch out for children, pets, open windows, or freshly washed cars, and blow debris safely away.

### OPERATION:

- Check your equipment before operation, especially the muffler, air intakes, and air filters.
- Install the blower tube. Refer to the ASSEMBLY section earlier in this manual.
- Start the blower. Refer to Starting and Stopping earlier in this manual.
- Hold the upper handle in your right hand.
- Move the blower from side to side along outer edge of the debris.
- Operate blower at the lowest possible throttle speed to do the job.

### GENERAL TIPS:

- To reduce sound levels, limit the number of pieces of equipment used at any one time.
- Use rakes and brooms to loosen debris before blowing.
- In dusty conditions, slightly dampen surfaces when water is available.
- Hold blower so the air stream can work close to the ground.
- After using blowers or other equipment, CLEAN UP! Dispose of debris properly.

### ⚠ WARNING

Never run the unit without the blower tubes installed. Use of an improperly assembled unit could result in serious personal injury.

### ⚠ WARNING

Do not place blower on top of or near loose debris or gravel. Debris may be sucked into blower intake vent resulting in damage to the unit and could result in serious personal injury.

### ⚠ WARNING

Always wear sound protection (ear muffs or ear plugs) to protect your hearing to reduce the risk of hearing loss associated with long term sound level(s).

### ⚠ WARNING


Always wear eye protection with side shields marked to comply with ANSI Z87.1. Failure to do so could result in objects being thrown into your eyes and other possible serious injuries.



## Cruise Control Feature

The cruise control lever can be used to operate the blower at desired speed without holding the throttle trigger.

- To engage, squeeze the throttle trigger and move the cruise control lever to the desired speed.

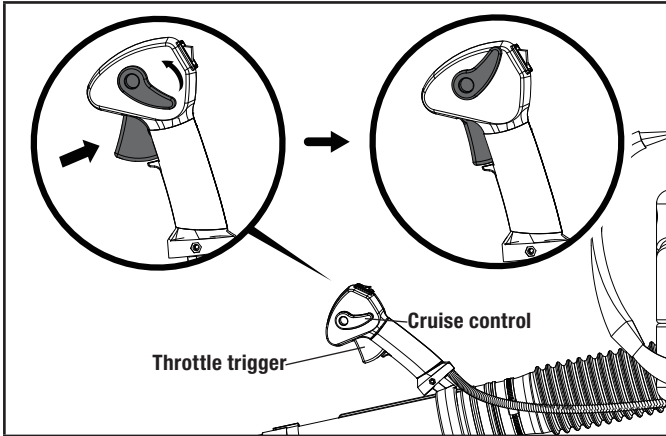

- To release, move the cruise control lever back to the original low position.

## MAINTENANCE

### ⚠ WARNING

Never operate a damaged or defective blower.

### ⚠ WARNING

Improper maintenance will void your warranty.

### 🗨 NOTICE

For Emission control devices and systems, read and understand your responsibilities for service as stated in the Emission Control Warranty Statement of this manual.

The owner/operator is responsible for all periodic maintenance.

Complete all scheduled maintenance in a timely manner.

Correct any issue before operating the trimmer.

For service or parts assistance, contact our Technical Support Team at 1-877-338-0999.

## General Maintenance

Avoid using solvents when cleaning plastic parts. Most plastics are susceptible to damage from various types of commercial solvents and may be damaged by their use. Use a clean cloth to remove dirt, dust, lubricant, grease, etc.

### ⚠ WARNING

Before inspecting, cleaning, or servicing the machine, shut off engine, wait for all moving parts to stop, and disconnect spark plug wire and move it away from spark plug. Failure to follow these instructions could result in personal injury or damage to your blower.

### ⚠ WARNING

When servicing, use only identical replacement parts. Use of any other parts could create a hazard or cause product damage.

### ⚠ WARNING

Do not let brake fluids, gasoline, petroleum based products, penetrating oils, etc., come in contact with plastic parts. Chemicals can damage, weaken, or destroy plastic which could result in serious personal injury.


### ⚠ WARNING

Tampering or adjusting the factory set carburetor is a Federal Violation and will void your warranty coverage.

## Cleaning the Air Filter


For proper performance and long life, keep the air filter clean.

1. Move choke knob to CHOKE position (See Cold Start section of manual) to prevent dirt and debris from entering carburetor.
2. Remove the air cleaner cover by turning the cover fasteners counter-clockwise. Brush away any accumulated dirt from the air filter cover area.

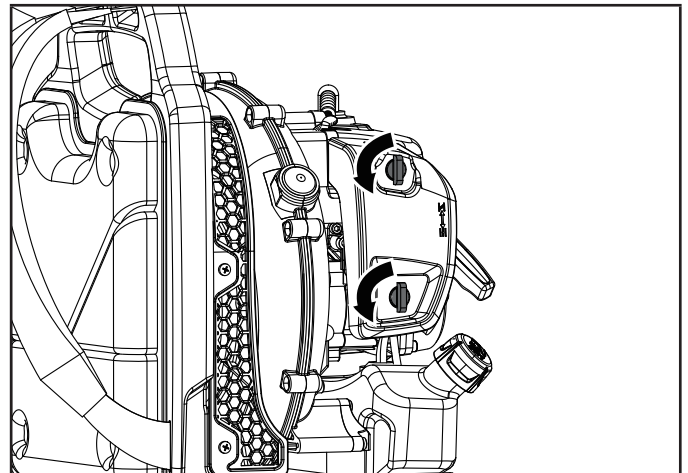



3. Inspect and replace or clean the air filter. To reassemble make sure the filter fits in the cavity and reinstall the filter as shown. Fasten the air filter cover by turning the fasteners clockwise.

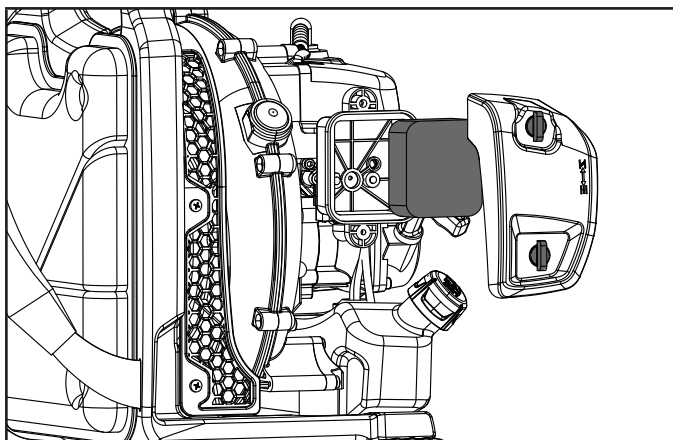

## Fuel Cap

### ⚠ WARNING

Check for fuel leaks. If you find any leaks, correct the problem before using the product. A leaking fuel cap is a fire hazard and must be replaced immediately. Failure to do so could result in a fire that could cause serious personal injury.

## Spark Plug

1. Remove spark plug and check for worn and rounded center electrode.
2. Clean, adjust or replace with a new spark plug per the gap specifications below.

OEM Type	NGK-BPMR7A
Replacement Type	TORCH-L8RTC
Gap	0.024" - 0.028" (0.6 - 0.7 mm)

## Maintenance Schedule

Follow the service intervals indicated in the schedule below. Service your blower more frequently when operating in adverse conditions. Contact our help line authorized service dealer. Time intervals shown are maximum. Actual use and your experience will determine the frequency of required maintenance.

### BEFORE USE

- ☐ Wipe up fuel leaks, fuel spillage.
- ☐ Inspect and clean fuel tank.

### EVERY 25 HOURS

- ☐ Clean cylinder fins and intake cooling vent.
- ☐ Inspect and clean the air filter.

### EVERY 50 HOURS

- ☐ Clean and readjust spark plug gap (gap: 0.6 - 0.7 mm [0.024 - 0.028"]), and replace if necessary.
- ☐ Clean exhaust port.
- ☐ Inspect and clean the air filter.

### ANNUALLY

- ☐ Replace spark plug.

## Storing The Blower

- Clean all foreign material from the blower. Store unit indoors in a dry, well-ventilated area that is inaccessible to children. Keep away from corrosive agents such as garden chemicals and deicing salts.
- Abide by all local regulations for the safe storage and handling of gasoline.

### When storing 1 month or shorter:

- Fuel stabilizer is an acceptable alternative in minimizing the formation of fuel gum deposits during storage. Add stabilizer to your fuel container (not the fuel tank on the blower). Run engine at least 3 minutes after adding stabilizer.

### When storing longer than a month:

- Drain all fuel from tank into a container approved for gasoline. Run engine until it stops.

## SPECIFICATIONS

### Backpack Blower Specifications

Model .....	200934
Displacement .....	42 cc
Type .....	2-Stroke
Air Velocity* .....	MAX 190 MPH (306 km/h)
.....	MAX 529 CFM (ft <sup>3</sup> /min)
Sound Pressure* .....	75 dB(A) @ 50 ft. (15.2 m)
Effective Fuel Tank Capacity .....	33.8 fl. oz. (1000 ml)
Fuel to Oil Mix Ratio .....	50:1

\*Rated per ANSI/OPEI B175.2-2012



## TROUBLESHOOTING

Problem	Cause	Solution
Engine does not start.	Fuel mixture is too rich.	Open choke.
	Fuel strainer clogged.	Clean fuel strainer.
	Fuel line clogged.	Clean fuel line.
	Flooded engine.	Let unit sit for 15 minutes or remove spark plug and clean per manual.
	Spark plug gap is incorrect.	Replace or adjust spark plug per instructions.
Engine dies or accelerates poorly.	Air filter dirty.	Clean air filter.
	Incorrect fuel.	Drain and fill with correct fuel/new fuel.
	Exhaust port / spark arrestor screen blocked.	Clean exhaust port / Spark arrestor screen.
Blower is weak or uneven.	Blower pipe is clogged or loose.	Inspect and make sure blower tubes are clear and clamps are installed tight and properly.

### For further technical support:

Technical Support Team  
Toll Free 1-877-338-0999  
[support@championpowerequipment.com](mailto:support@championpowerequipment.com)



# WARRANTY\*

CHAMPION POWER EQUIPMENT  
2 YEAR LIMITED WARRANTY

## Warranty Qualifications

To register your product for warranty and FREE lifetime call center technical support please visit:

<https://www.championpowerequipment.com/register>

To complete registration you will need to include a copy of the purchase receipt as proof of original purchase. Proof of purchase is required for warranty service. Please register within ten (10) days from date of purchase.

## Repair/Replacement Warranty

CPE warrants to the original purchaser that the mechanical and electrical components will be free of defects in material and workmanship for a period of two years (parts and labor) from the original date of purchase and 180 days (parts and labor) for commercial and industrial use. Transportation charges on product submitted for repair or replacement under this warranty are the sole responsibility of the purchaser. This warranty only applies to the original purchaser and is not transferable.

## Do Not Return The Unit To The Place Of Purchase

Contact CPE's Technical Service and CPE will troubleshoot any issue via phone or e-mail. If the problem is not corrected by this method, CPE will, at its option, authorize evaluation, repair or replacement of the defective part or component at a CPE Service Center. CPE will provide you with a case number for warranty service. Please keep it for future reference. Repairs or replacements without prior authorization, or at an unauthorized repair facility, will not be covered by this warranty.

## Warranty Exclusions

This warranty does not cover the following:

### Normal Wear

Products with mechanical and electrical components need periodic parts and service to perform well. This warranty does not cover repair when normal use has exhausted the life of a part or the equipment as a whole.

### Installation, Use and Maintenance

This warranty will not apply to parts and/or labor if the product is deemed to have been misused, neglected, involved in an accident, abused, loaded beyond the product's limits or modified. Normal maintenance is not covered by this warranty and is not required to be performed at a facility or by a person authorized by CPE.

## Other Exclusions

This warranty excludes:

- Cosmetic defects such as paint, decals, etc.
- Wear items such as starter pulleys, starter ropes, filter elements, belts, blower fans, impeller blades, blower and/or vacuum tubes, vacuum bag and straps (where applicable), etc.
- Failures due to acts of God and other force majeure events beyond the manufacturer's control.
- Problems caused by parts that are not original Champion Power Equipment parts.

## Limits of Implied Warranty and Consequential Damage

Champion Power Equipment disclaims any obligation to cover any loss of time, use of this product, freight, or any incidental or consequential claim by anyone from using this product. THIS WARRANTY AND THE ATTACHED U.S. EPA and/or CARB EMISSION CONTROL SYSTEM WARRANTIES (WHEN APPLICABLE) ARE IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

A unit provided as an exchange will be subject to the warranty of the original unit. The length of the warranty governing the exchanged unit will remain calculated by reference to the purchase date of the original unit.

This warranty gives you certain legal rights which may change from state to state or province to province. Your state or province may also have other rights you may be entitled to that are not listed within this warranty.

## Contact Information

### Address

Champion Power Equipment, Inc.  
12039 Smith Ave.  
Santa Fe Springs, CA 90670 USA  
[www.championpowerequipment.com](http://www.championpowerequipment.com)

### Customer Service

Toll Free: 1-877-338-0999  
[info@championpowerequipment.com](mailto:info@championpowerequipment.com)  
Fax no.: 1-562-236-9429

### Technical Service

Toll Free: 1-877-338-0999  
[tech@championpowerequipment.com](mailto:tech@championpowerequipment.com)

📞 EMERGENCY 24 HOUR SUPPORT: 1-562-204-1188

\*Except as otherwise stipulated in any of the following enclosed Emission Control System Warranties (when applicable) for the Emission Control System: U.S. Environment Protection Agency (EPA) and/or California Air Resources Board (CARB).



**CHAMPION POWER EQUIPMENT, INC. (CPE) AND  
THE UNITED STATES ENVIRONMENTAL PROTECTION AGENCY (U.S. EPA)  
EMISSION CONTROL SYSTEM WARRANTY**

**Your Champion Power Equipment (CPE) engine complies with U.S. EPA emissions regulations.**

**YOUR WARRANTY RIGHTS AND OBLIGATIONS:**

The U.S. EPA and CPE are pleased to explain the Federal Emission Control System's Warranty on your 2023 small off-road engine and engine powered equipment. In the United States new equipment that use small off-road engines shall be designed, built and equipped to meet U.S. EPA regulations. CPE shall warrant the emission control system on your small off-road engine and equipment for the period of listed below, provided there has been no abuse, neglect, unapproved modification or improper maintenance of your equipment.

Your emission control system may include parts such as: carburetor, fuel tanks, fuel lines (for liquid fuel and fuel vapors), fuel caps, valves, canisters, filters, clamps, connectors, and other associated components. Where a warrantable condition exists, CPE will repair your small off-road engine at no cost to you including diagnosis, parts and labor.

**MANUFACTURER'S WARRANTY COVERAGE:**

This emission control system is warranted for two years. If any emission related part on your engine or equipment is defective, the part will be repaired or replaced by CPE.

**OWNER'S WARRANTY RESPONSIBILITIES:**

As the small off-road engine owner, you are responsible for the performance of the required maintenance listed in your Owner's Manual. CPE recommends that you retain all your receipts covering maintenance on your small off-road engine, but CPE cannot deny warranty solely for the lack of receipts.

As the small off-road engine owner, you should be aware that CPE may deny you warranty coverage if your small off-road engine or a part has failed due to abuse, neglect, or improper maintenance or unapproved modifications.

You are responsible for presenting your small off-road engine to an Authorized CPE distribution center or service center or alternate service outlet as soon as a problem exists. The warranty repairs shall be completed in a reasonable amount of time, not to exceed 30 days.

If you have any questions regarding your warranty coverage, you should contact:

Champion Power Equipment, Inc.  
Customer Service  
12039 Smith Ave.  
Santa Fe Springs, CA 90670  
1-877-338-0999  
tech@championpowerequipment.com



## **EMISSION CONTROL SYSTEM WARRANTY**

- 1. APPLICABILITY:** This section applies to Emissions Control Systems on small off-road engines or equipment that use small off-road engines subject to the emission standards in this Article. The warranty period begins on the date the new engine or equipment is delivered to an ultimate purchaser and shall continue for 24 consecutive months thereafter.
- 2. GENERAL EMISSIONS WARRANTY COVERAGE**

CPE warrants to the ultimate purchaser of the new engine or equipment and to each subsequent owner that the Emissions Control System when installed is:

  - 2a. Designed, built and equipped to conform to U.S. EPA emissions standards for spark-ignited engines at or below 19 kilowatts;
  - 2b. Free from defects in materials and workmanship that cause the failure of a warranted part to be identical in all material respects to the part as described in the engine manufacturer's application for certification for a period of two years.
- 3. THE WARRANTY ON EXHAUST AND EVAPORATIVE EMISSION-RELATED PARTS WILL BE INTERPRETED AS FOLLOWS:**
  - 3a. Any warranted part that is not scheduled for replacement as required maintenance in the Operators Manual required by subsection (e) must be warranted for the warranty period defined in subsection (b)(2). If any such part fails during the period of warranty coverage, it must be repaired or replaced by CPE according to subsection (3)(3d) below. Any such part repaired or replaced under the warranty must be warranted for a time not less than the any remaining warranty period.
  - 3b. Any warranted emissions-related part that is scheduled only for regular inspection in the Operators Manual shall be warranted for the warranty period defined in subsection (b)(2). A statement in such written instructions to the effect of "repair or replace as necessary" shall advise owners of the warranty coverage for emissions related parts. Replacement within the warranty period is covered by the warranty and will not reduce the period of warranty coverage. Any such emission-related part repaired replaced under warranty shall be warranted for a time not less than the remaining warranty period.
  - 3c. Any warranted emissions-related part that is scheduled for replacement as required maintenance in the Operators Manual shall be warranted for the period of time prior to the first scheduled replacement point for that part. If the part fails prior to the first scheduled replacement, the part shall be repaired or replaced by CPE according to Subsection (3)(3d) below. Any such emissions-related part repaired or replaced under warranty shall be warranted for a time not less than the remainder of the period prior to the first scheduled replacement point for such emissions-related part.
  - 3d. Repair or replacement of any warranted emissions-related part under the Warranty provisions of this article shall be performed at no charge to the owner at a CPE Authorized Service Outlet.
  - 3e. The owner of the small off-road engine shall not be charged for diagnostic labor that leads to the determination that a warranted part is in fact defective, provided that such diagnostic work is performed at a CPE Authorized Service Outlet.
  - 3f. CPE shall pay for covered emissions warranty repairs at non-authorized service outlets under the following circumstances:
    - i. The service is required in a population center with a population over 100,000 according to U.S. Census 2000 without a CPE Authorized Service Outlet AND
    - ii. The service is required more than 100 miles from a CPE Authorized Service Outlet. The 100-mile limitation does not apply in the following states: Alaska, Arizona, Colorado, Hawaii, Idaho, Montana, Nebraska, Nevada, New Mexico, Oregon, Texas, Utah and Wyoming.
  - 3g. CPE shall be liable for damages to other original engine components or approved modifications proximately caused by a failure under warranty of an emission-related part covered by the ECS Warranty.
  - 3h. Throughout the Emissions Control Systems Warranty period, CPE shall maintain a supply of warranted emission-related parts sufficient to meet the expected demand for such emission-related parts.
  - 3i. Any CPE Authorized, and approved emission-related replacement part may be used in the performance of any ECS Warranty maintenance or repair and will be provided without charge to the owner. Such use shall not reduce CPE's warranty obligation.
  - 3j. Unapproved add-on or modified parts may not be used to modify or repair a CPE engine. Such use voids this Warranty and shall be grounds for disallowing a warranty claim. CPE shall not be liable hereunder for failures of any warranted parts of a CPE engine caused by the use of such an unapproved add-on or modified part.



**EMISSION-RELATED PARTS INCLUDE THE FOLLOWING: (using those portions of the list applicable to the engine)**

<b>Systems covered by this warranty</b>	<b>Parts Description</b>
Fuel Metering System	Fuel regulator, Carburetor and internal parts
Air Induction System	Air cleaner, Intake manifold
Ignition System	Spark plug and parts, Magneto ignition system
Exhaust System	Exhaust manifold, catalytic converter
Miscellaneous Parts	Tubing, Fittings, Seals, Gaskets, and Clamps associated with these listed systems.
Evaporative Emissions	Fuel Tank, Fuel Cap, Fuel Lines (for liquid fuel and fuel vapors), Fuel Line Fittings, Clamps, Pressure Relief Valves, Control Valves, Control Solenoids, Electronic Controls, Vacuum Control Diaphragms, Control Cables, Control Linkages, Purge Valves, Gaskets, Liquid/Vapor Separator, Carbon Canister, Canister Mounting Brackets, Carburetor Purge Port Connector

**TO OBTAIN WARRANTY SERVICE:**

You must take your CPE engine or the product on which it is installed, along with your warranty registration card or other proof of original purchase date, at your expense, to any Champion Power Equipment dealer who is authorized by Champion Power Equipment, Inc. to sell and service that CPE product during normal business hours. Alternate service locations defined in Section (3)(f.) above must be approved by CPE prior to service. Claims for repair or adjustment found to be caused solely by defects in material or workmanship will not be denied because the engine was not properly maintained and used.

**If you have any questions regarding your warranty rights and responsibilities, or to obtain warranty service, please write or call Customer Service at Champion Power Equipment, Inc.**

**Champion Power Equipment, Inc.**  
12039 Smith Ave.  
Santa Fe Springs, CA 90670  
1-877-338-0999  
Attn.: Customer Service  
tech@championpowerequipment.com